




79.95 EUR

incl. 19% VAT, plus [shipping](#)

- Intel Celeron 1007U !
- Dual Gigabit LAN !
- WinXP, Win7, Win 8 !

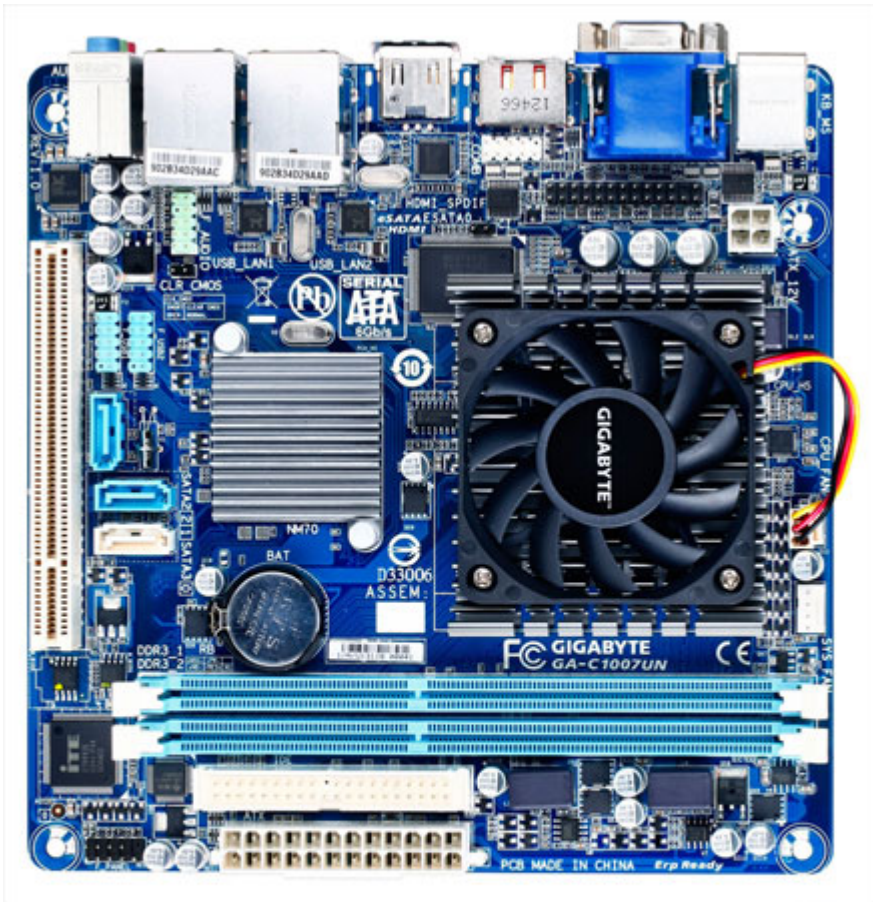

- GIGABYTE Dual UEFI BIOS
- All new design of Ultra Durable 4 classic
- Industry's Leading All Solid Capacitor Design
- Dual LAN for networking flexibility
- HDMI interface for smoother HD video playback
- GIGABYTE On/Off Charge™ for USB devices
- Windows 8 ready

1. Built in with an Intel® Dual-core Celeron® 1007U processor (1.5 GHz)

* Do not disassemble the onboard CPU/chipset and the heatsinks/fan by yourself to avoid damage to these components.

CPU

2. 2 MB L3 cache

Chipset

1. Intel® NM70 Chipset

Memory	1. 2 x 1.5V DDR3 DIMM sockets supporting up to 16 GB of system memory * Due to a Windows 32-bit operating system limitation, when more than 4 GB of physical memory is installed, the actual memory size displayed will be less than the size of the physical memory installed. 2. Dual channel memory architecture 3. Support for DDR3 1333/1066 MHz memory modules (Please refer "Memory Support List" for more information.)
Onboard Graphics	Integrated Graphics Processor: 1. 1 x D-Sub port 2. 1 x HDMI port, supporting a maximum resolution of 1920x1200 * Support for HDMI 1.4 version. 3. Maximum shared memory of 1 GB
Audio	1. Realtek ALC887 codec 2. High Definition Audio 3. 2/4/5.1/7.1-channel * To configure 7.1-channel audio, you have to use an HD front panel audio module and enable the multi-channel audio feature through the audio driver.
LAN	1. 2 x Realtek GbE LAN chips (10/100/1000 Mbit)
Expansion Slots	1. 1 x PCI slot
Storage Interface	Chipset: 1. 1 x SATA 6Gb/s connector (SATA3 0) supporting up to 1 SATA 6Gb/s device 2. 2 x SATA 3Gb/s connectors (SATA2 1~2) supporting up to 2 SATA 3Gb/s devices 3. 1 x eSATA 3Gb/s connector on the back panel supporting up to 1 SATA 3Gb/s device
USB	JMicron JMB368 chip: 1. 1 x IDE connector supporting ATA-133/100/66/33 and up to 2 IDE devices Chipset: 1. Up to 8 USB 2.0/1.1 ports (4 ports on the back panel, 4 ports available through the internal USB headers)

Internal I/O Connectors	1.	1 x 24-pin ATX main power connector
	2.	1 x 4-pin ATX 12V power connector
	3.	1 x IDE connector
	4.	1 x SATA 6Gb/s connector
	5.	2 x SATA 3Gb/s connectors
	6.	1 x CPU fan header
	7.	1 x system fan header
	8.	1 x front panel header
	9.	1 x front panel audio header
	10.	2 x USB 2.0/1.1 headers
	11.	1 x parallel port header
	12.	1 x serial port header
	13.	1 x Clear CMOS jumper
	14.	1 x chassis intrusion header
Back Panel Connectors	1.	1 x PS/2 keyboard port
	2.	1 x PS/2 mouse port
	3.	1 x D-Sub port
	4.	1 x serial port
	5.	1 x HDMI port
	6.	4 x USB 2.0/1.1 ports
	7.	1 x eSATA 3Gb/s connector
	8.	2 x RJ-45 ports
	9.	3 x audio jacks (Line In/Line Out/Microphone)
I/O Controller	1.	iTE I/O Controller Chip
	1.	System voltage detection
H/W Monitoring	2.	CPU/System temperature detection
	3.	CPU/System fan speed detection
	4.	System fan speed control
		* Whether the system fan speed control function is supported will depend on the system cooler you install.

BIOS	1. 2 x 32 Mbit flash
	2. Use of licensed AMI EFI BIOS
	3. Support for DualBIOS™
	4. PnP 1.0a, DMI 2.0, SM BIOS 2.6, ACPI 2.0a
Unique Features	1. Support for @BIOS
	2. Support for Q-Flash
	3. Support for Xpress Install
	4. Support for Xpress Recovery2
	5. Support for EasyTune 6
	* Available functions in EasyTune 6 may differ by motherboard model.
	6. Support for Smart Recovery 2
	7. Support for Auto Green
Bundle Software	8. Support for ON/OFF Charge
	1. Norton Internet Security (OEM version)
Operating System	2. Intel® Smart Connect Technology
	1. Support for Microsoft Windows 8/7/XP
Form Factor	1. Mini-ITX Form Factor; 17.0cm x 17.0cm
Remark	1. Due to different Linux support condition provided by chipset vendors, please download Linux driver from chipset vendors' website or 3rd party website.
	2. Most hardware/software vendors may no longer offer drivers to support Win9X/ME/2000/XP SP1/SP2. If drivers are available from the vendors, we will update them on the GIGABYTE website.