


219.00 EUR  
incl. 19% VAT, plus [shipping](#)

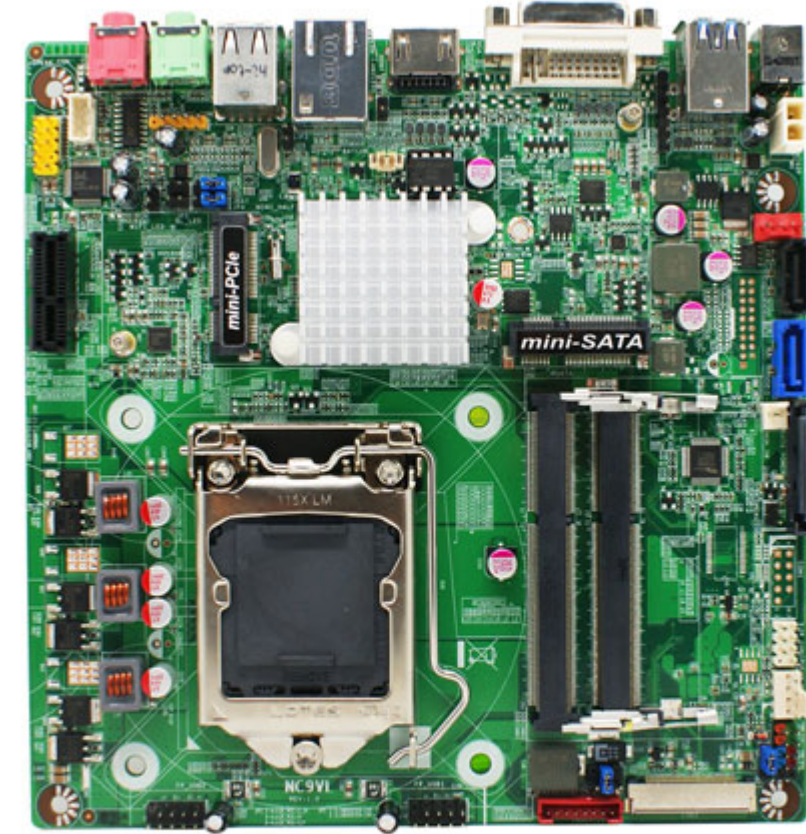

- Intel® H81 Chipset
- Supports Intel LGA 1150 Socket 4th Generation Core™ i3, i5, i7 & Pentium Processors
- 2 \* Dual Channel SO-DIMM DDR3-1333/1600 up to 16GB
- 1\*HDMI output
- Support CPU Smart FAN
- Supports 1 \* Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Thin Mini ITX form factor

|                         |                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------|
| <b>CPU</b>              | • INTEL® LGA 1150 Socket 4th generation Core i7/i5/i3/Pentium Processor                                 |
| <b>Chipset</b>          | • INTEL® H81 Chipset                                                                                    |
| <b>Memory</b>           | • 2 * SO-DIMM Sockets Dual Channel DDR3 1600/1333 SDRAM up to 16 GB                                     |
| <b>Expansion Slots</b>  | • 1 *PCIe x 1<br>• 1 * half size Mini PCI-E socket                                                      |
| <b>Storage</b>          | • 1 * Serial ATA2 3Gb/s & 1 * Serial ATA3 6Gb/s connectors<br>• 1 * full size mSATA socket (only mSATA) |
| <b>Audio</b>            | • Realtek ALC662 6-Channel HD Audio CODEC                                                               |
| <b>Ethernet LAN</b>     | • Intel i217/LM Gigabit Ethernet LAN *1                                                                 |
| <b>USB</b>              | • 6* USB 2.0/1.1 & 2 * USB3.0                                                                           |
| <b>Special Features</b> | • Support ACPI S3<br>• Support CPU Smart FAN<br>• Support Watch Dog                                     |

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>Rear Panel I/O</b> | <ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 &amp; 2 * USB 3.0 ports</li> <li>• 1 * HDMI</li> <li>• 1 * DVI-I port</li> <li>• 1 * 19V DC-in jack</li> <li>• 1 * RJ-45 port</li> <li>• 1 * MIC-in &amp; 1 * Line-out jacks</li> </ul>                                                                                                                                                                                                                                    |
| • <b>Internal I/O</b>   | <ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 headers</li> <li>• CPU /System Fan connectors;</li> <li>• 1 * PS/2 header</li> <li>• 1 * 24-bits Dual CH LVDS &amp; 1 * Inverter connector</li> <li>• 1 * CIR header</li> <li>• 1 * AUDIO header</li> <li>• 1 * Speaker header</li> <li>• 1 * DMIC header</li> <li>• 1 * Front panel header</li> <li>• 1 * FPD Brightness connector</li> <li>• 1 * 2-pin ATX Power header</li> <li>• 1 * 2-pin open case header</li> </ul> |
| • <b>BIOS</b>           | • AMI 64Mb DIP Flash ROM                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| • <b>Form Factor</b>    | • Thin Mini ITX Form Factor (170mm x 170mm)                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| • <b>Functional</b>     | • ATM, POS, AIO, Panel PC, Digital Signage                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| • <b>Certificate</b>    | • CE, FCC, RoHS                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| • <b>Temperature</b>    | <ul style="list-style-type: none"> <li>• Operating within 0~60 centigrade</li> <li>• Storage within -20-85 centigrade</li> </ul>                                                                                                                                                                                                                                                                                                                                                    |